



## Global® 333 Series – High speed single needle lockstitch machines

### TECHNICAL SPECIFICATIONS

#### Machine speed\*

333 D / 333 TD / 333 AUT

max. 5000 spm

#### Machine speed\*

333 LH / 333 LH-AUT

max. 3500 spm

#### Stitch length

333 D / 333 TD / 333 AUT

5 mm

333 LH / 333 LH-AUT

7 mm

#### Needle type

134 R

#### Presser foot lift

13 mm

#### Electric presser foot lift

available as option on

333 TD / 333 AUT

333 LH-AUT

**333 D** - High speed, single needle lockstitch machine with fully automatic lubrication.

**333 TD** - Same as 333 D, but with thread trimmer.

**333 LH** - Medium speed, single needle lockstitch machine with fully automatic lubrication and large hook.

**333 AUT** - Same as 333 D, but with thread trimmer and auto back tack.

**333 LH-AUT** - Same as 333 LH, but with thread trimmer and auto back tack.

### **MAQUINA DE PESPUNTE 1 AGUJA DE ALTA VELOCIDAD**

**333 D** - Una aguja pespunte, alta velocidad con lubricación automática.

**333 TD** - La misma que 333 D, pero equipada con corta-hilos.

**333 LH** - Una aguja pespunte, media velocidad con lubricación automática y garfio grande.

**333 AUT** - La misma que 333 D, pero equipada con corta-hilos y remate.

**333 LH-AUT** - La misma que 333 LH, pero equipada con corta-hilos y remate.

### **EINNADEL - DOPPELSTAPPSTICH - SCHNELLNÄHER**

**333 D** - Hochgeschwindigkeits - Einnadel - Steppstichmaschine mit Zentralschmierung.

**333 TD** - Baugleich mit 333 D, jedoch mit Fadenabschneider .

**333 LH** - Gewerbemaschine, Einnadel - Steppstich mit Zentralschmierung und großem Greifer.

**333 AUT** - Baugleich mit 333 D, jedoch mit Fadenabschneider und Verriegelung.

**333 LH-AUT** - Baugleich mit 333 LH, jedoch mit Fadenabschneider und automatischer Verriegelung.

### **MACHINES POINT NOUÉ UNE AIGUILLE A GRANDE VITESSE**

**333 D** - Piqueuse point noué une aiguille à grande vitesse et lubrification automatique.

**333 TD** - Identique au modèle 333 D, mais avec coupe-fil.

**333 LH** - Piqueuse point noué une aiguille, vitesse moyenne, lubrification automatique et grande crochet.

**333 AUT** - Identique au modèle 333 D, mais avec coupe-fil et arrêts automatiques.

**333 LH-AUT** - Identique au modèle 333 LH, mais avec coupe-fil et arrêts automatiques .

### **MACCHINA PUNTO ANNODATO 1 AGO ALTA VELOCITA**

**333 D** - Macchina punto annodato 1 ago, alta velocita, con lubrificazione completamente automatica.

**333 TD**- Come la 333 D, ma con rasafilo.

**333 LH** - Macchina punto annodato 1 ago, crochet grande, velocita media, con lubrificazione completamente automatica.

**333 AUT** - Come la 333 D, ma con rasafilo e fermatura inizio e fine.

**333 LH-AUT** - Come la 333 LH, ma con rasafilo e fermatura inizio e fine.

## Global® 333 Series

These new Global® 333 series are most dependable light running machines for sewing light to medium heavy materials.

These machines will produce a top quality stitch.

Left:  
The 333 LH and 333 LH-AUT  
are equipped with large hook.




Right:  
The 333 AUT and 333 LH-AUT  
are equipped with an  
electromechanical underbed  
thread trimming device.









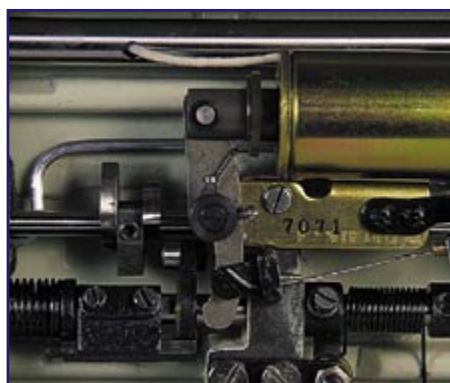




Left:  
A built-in oil reservoir, pump  
and minimum of wicking  
features constant lubrication  
where required. Oil flow can  
easily be checked through  
sightgauge on top arm cover.



Right:  
The 333 TD, 333 AUT and 333  
LH-AUT are equipped with  
an electrical thread trimmer  
movement.



### Specifications

 model	 number of needles	 max. stitch length mm	 presser foot lift mm	 space to right of needle mm	 bedplate dimensions mm	 needle system	 max. sewing speed spm*	 thread trimmer	 back tack/ reverse	 electric presser foot lift
333 D	1	5	13	260	480x178	134R	5000	—	manual	—
333 TD	1	5	13	260	480x178	134R	5000	●	manual	option
333 AUT	1	5	13	260	480x178	134R	5000	●	aut.	option
333 LH	1	7	13	260	480x178	134R	3500	—	manual	—
333 LH-AUT	1	7	13	260	480x178	134R	3500	●	aut.	option

★ Max. sewing speed (in spm.) depends on type of operation and/or materials to be sewn.

The GLOBAL® Selection is brought to you by:

GLOBAL® is a trademark of the Global International Corporation, the people that carefully organize the supply of spareparts before they launch each product.

When ordering parts please specify:

- ① machine model
- ② part numbers