



## Global® CB 2800 Series UTC – Coverstitch machines

### TECHNICAL SPECIFICATIONS

#### Machine speed\*

5500 spm

#### Stitch type

602 or 605

#### Number of needles

2 or 3

#### Needle gauges

4.8 - 5.6 - 6.4 mm

$\frac{3}{16}$  -  $\frac{7}{32}$  -  $\frac{1}{4}$  inch

#### Feed type

differential feed

#### Differential ratio

1:03 - 1:2.9

#### Stitch length

min. 1.4 mm -  $\frac{3}{64}$  inch

max. 3.6 mm -  $\frac{9}{64}$  inch

#### Presser foot lift

up to 7 mm -  $\frac{9}{32}$  inch

#### Needle type

UY 128 Gas

#### Bed type

cylinderarm

**CB 2802 / 2803 UTC** - High speed, top and bottomcover chainstitch machines, cylinder arm, fully automatic lubrication, differential feed. Equipped with a lower and upper thread trimmer and presser foot lift (all pneumatic).

### MAQUINAS RECUBRIDORAS

**CB 2802 / 2803 UTC** - Máquina recubridora superior - inferior de cadeneta, con brazo cilíndrico. Lubricación automática y arrastre diferencial. Equipada con alza-prensateclas y corta-hilos para el hilo superior e inferior (todo neumática).

### ÜBERDECKNAHT-MASCHINE

**CB 2802 / 2803 UTC** - Hochgeschwindigkeits- Ober- und Unterüberdecknaht-Kettenstichmaschine, Zylinderarm, vollautomatische Ölung, Differential-Transport, ausgerüstet mit einem Ober- und Unterfadenabschneider sowie Drückerfußblüftung (alle pneumatisch).

### MACHINE CANON

**CB 2802 / 2803 UTC** - Machine canon point de chaînette à grande vitesse, lubrification entièrement automatique, griffe différentielle, recouvrement dessus/dessous. Equipée avec coupe-fils inférieur et supérieur et relevage du presseur (tout pneumatique).

### MACCHINA CATENELLA A BRACCIO CON COPERTURA



**CB 2802 / 2803 UTC** - Macchina punto catenella, copertura sopra e sotto, braccio cilindrico con differenziale e lubrificazione automatica. Dotata di rasafilo superiore ed di alzapiedino pneumatico.

## Global® CB 2800 UTC Series

The CB 2800 UTC series are high quality 2 or 3 needle cylinder bed machines with top and bottom cover stitch and improved differential feed mechanism. These machines are equipped with a lower and upper thread trimmer and presser foot lift (all pneumatic). CB 2880 series are equipped with left hand fabric trimmer, including thread trimmer.

### Some features of the Global® CB 2800 Series

- swing-up type looper for easy threading
- fully automatic lubricated
- high quality precision parts
- interchangeable oil-filter
- high speed: up to 5500 spm
- vibration free
- cylinder dimensions (w x h)  
mm: 90 x 60 / inch: 3<sup>1</sup>/<sub>2</sub> x 2<sup>3</sup>/<sub>8</sub>

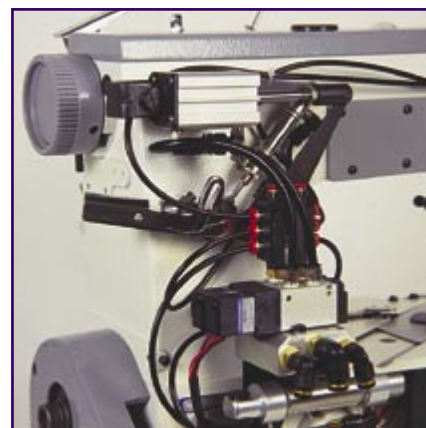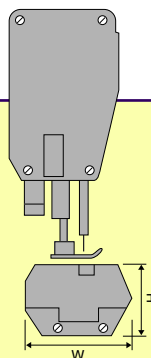

Pneumatic thread trimming and presser foot device



CB 2882/3 is equipped with a left hand knife



Pneumatic under thread trimmer



Pneumatic upper thread trimmer

### Specifications

model	number of needles	number of threads	needle distance			outside stitch length mm	differential feed ratio mm	presser foot lift	needle system	max. sewing speed*
			4.8 3/16	5.6 7/32	6.4 1/4					
CB 2802 UTC	2	4	●	—	—	1.4 - 3.6	1:03 - 1:2.9	5	UY128GAS	5500
CB 2803 UTC	3	5	—	●	—	1.4 - 3.6	1:03 - 1:2.9	5	UY128GAS	5500
CB 2803 UTC	3	5	—	—	●	1.4 - 3.6	1:03 - 1:2.9	5	UY128GAS	5500
CB 2823 UTC	3	5	—	—	●	1.4 - 3.6	1:03 - 1:2.9	5	UY128GAS	5000
CB 2882 UTC	2	4	●	—	—	1.4 - 3.6	1:03 - 1:2.9	5	UY128GAS	4500
CB 2883 UTC	3	5	—	●	—	1.4 - 3.6	1:03 - 1:2.9	5	UY128GAS	4500

★ Max. sewing speed (in spm.) depends on type of operation and/or materials to be sewn.

The GLOBAL® Selection is brought to you by:

GLOBAL® is a trademark of the Global International Corporation, the people that carefully organize the supply of spareparts before they launch each product.

When ordering parts please specify:

- ① machine model
- ② part numbers